1/12




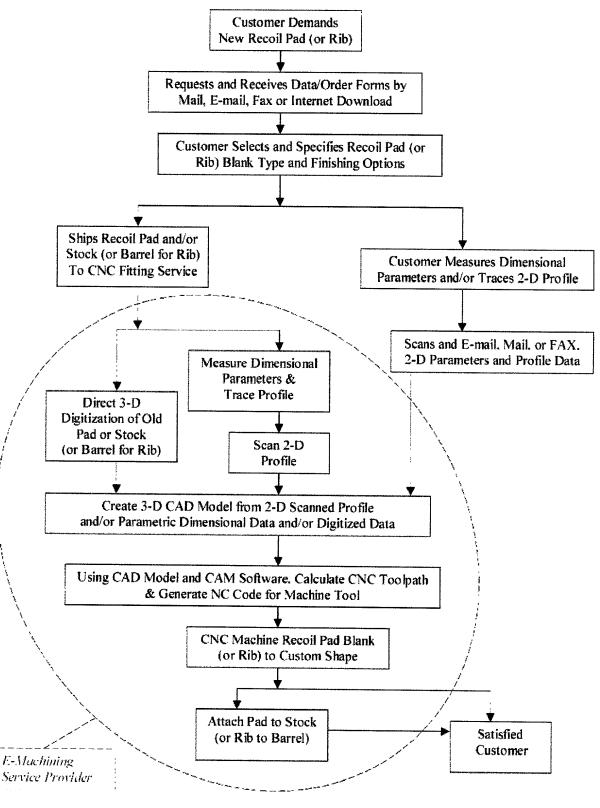


FIG. 1

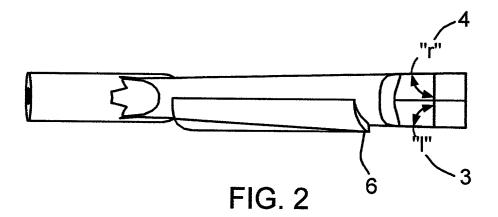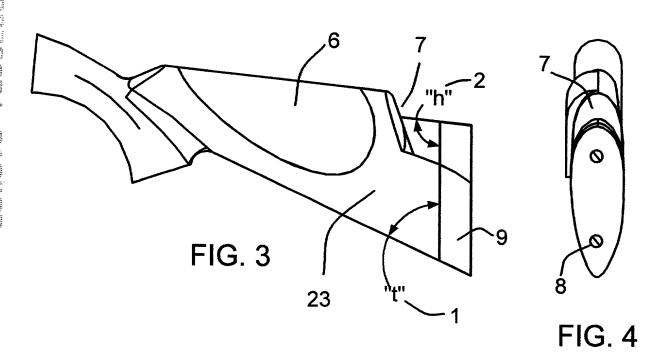

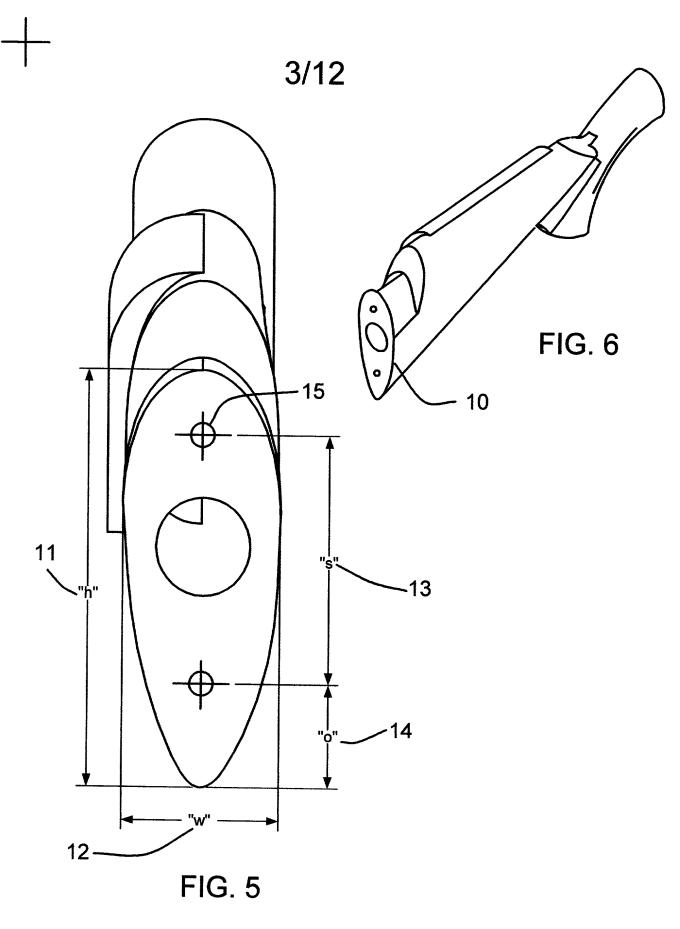

4



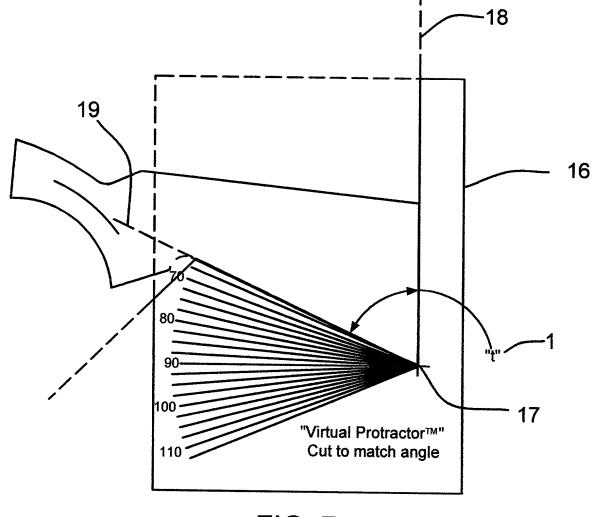


FIG. 7




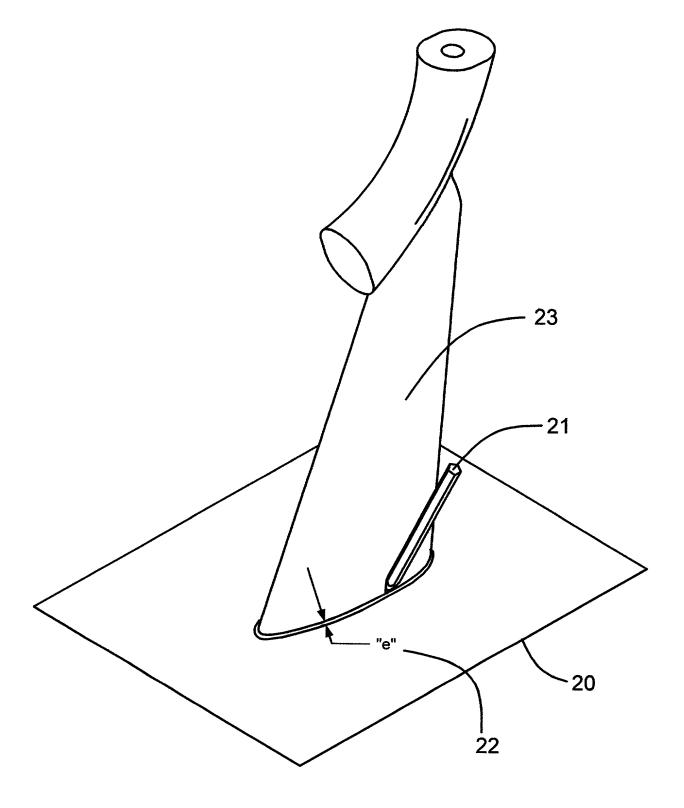


FIG. 8



inches** smaller than stock inches** larger than stock ** Distance is offset from edge, not overall size. inches inches inches inches Specify Desired Fit with Stock (check one) O **DIMENSIONAL DATA** measured accurately from stock) ။ ဟ Exact Fit, Flush with Stock Estimated Trace Offset **Bottom Screw Position** ☐ Undersize, Specify □ Oversize, Specify_ 3ottom "toe" Angle, Fop "heel" Angle, Maximum Length Maximum Width, Screw Spacing, use EclecTech's Print-on-Paper Virtual-Protractor® & Virtual-Eclectic Technologies Inc. Copyright December 2000 Data Aquisition Form © Pro-Fit® Recoil Pads to accurately determine Profile & Parametric If you do not have real , Farmington CT measuring tools, dimensions! Scale® Profile & Screw Hole Locations Here (* Use fine tip pen or pencil to minimize distance from the center of the traced tracing offset error "O", which is the line to the actual edge of the stock) **Accurately Trace Stock** 1 division = 125 Inch Grid Scale: O 0

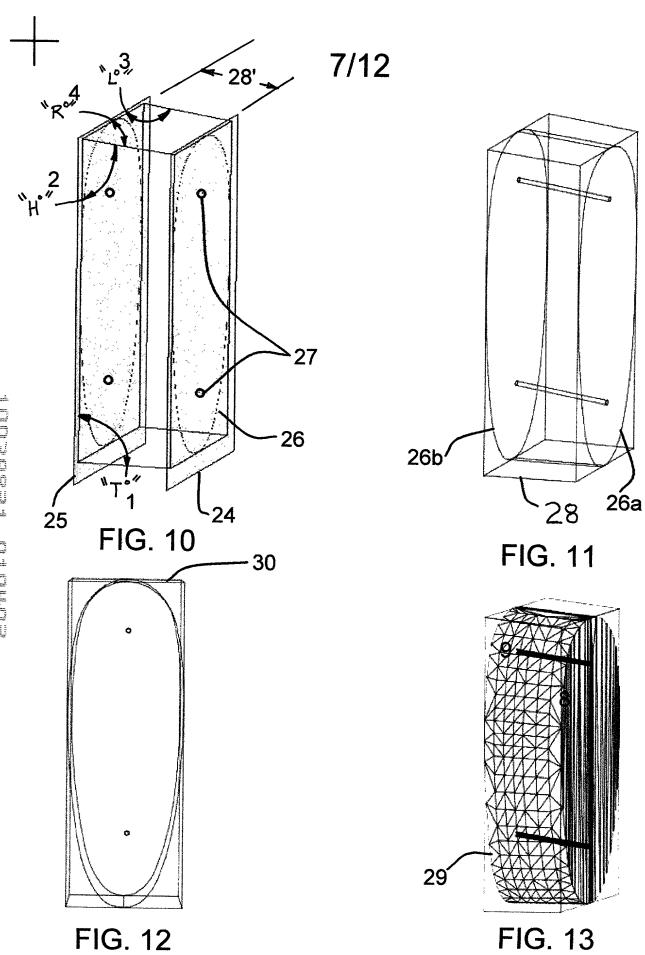

--



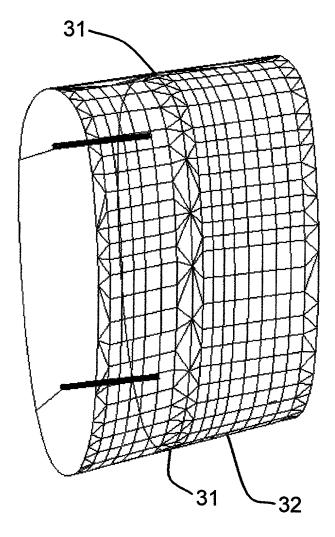


FIG. 14



9/12

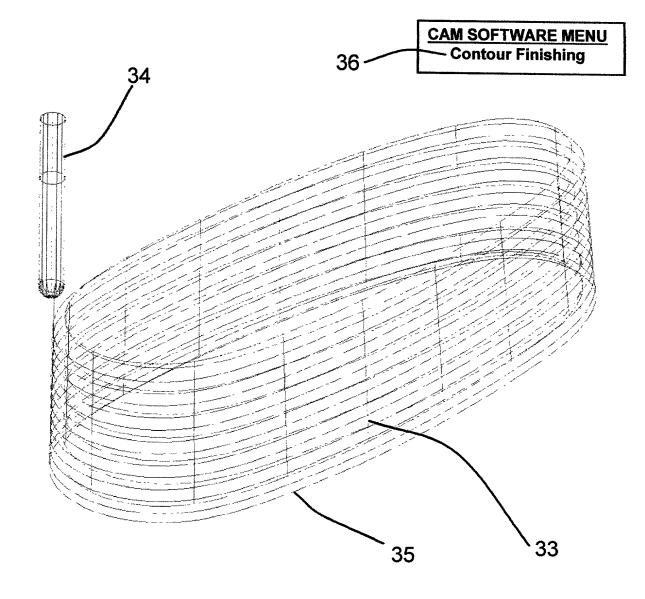


FIG. 15





10/12

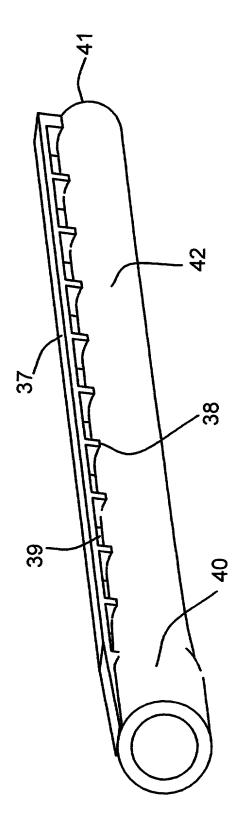


FIG. 16



Dimensional Data:

11/12

Measure Length to nearest 1/16 inch Measure Diameter in 1/1000 inch

L17	D17	
L16	D16	
L15	D15	
L14	D14 D15	
L9 L10 L11 L12 L13 L14 L15 L16 L17	D13	
L12	D12	
L11	D11	
L10	D10	
F-3	60	
L8	8Q	
L7	2 0	
97	90	
F7	90	
L4	D4	
Г3	D3	
7	D2	
17	D1	

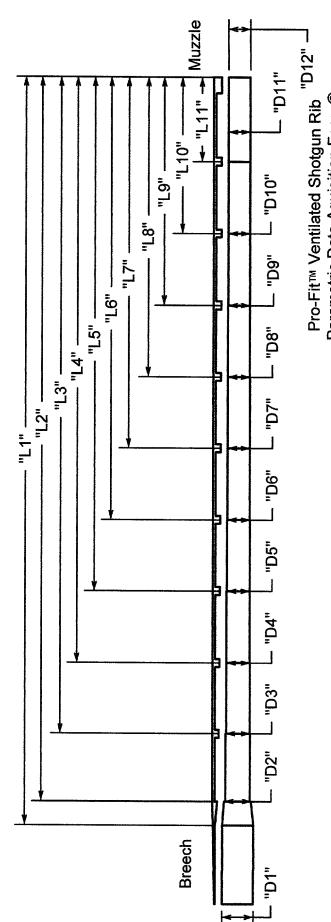


FIG. 17

Parametric Data Aquisition Form © Copyright December 2000, Eclectic Technologies Inc., Farmington CT

